


Installation Details - Additional Attic Installation

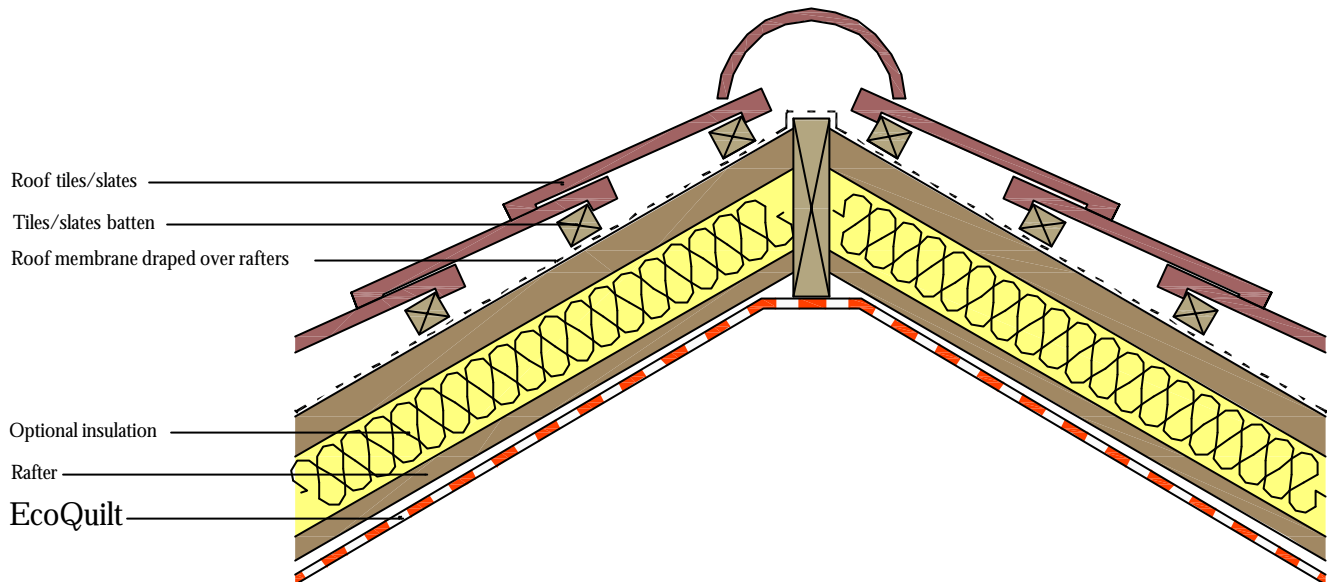

Additional Attic Insulation - Pitch Detail

Installation Instructions

Fitting Instructions

To fit vertically from top to bottom
Measure from the eaves to the apex of the roof
Cut EcoQuilt to length plus additional 100mm
Staple the EcoQuilt to the underside of the rafters
Fix the next row in the same way overlapping the sealed edges
The unique 1.2m width will ensure your joists overlap on a rafter

To fit horizontally, roll out the EcoQuilt parallel to the eaves.
Staple the EcoQuilt to the underside of the rafters as you roll
The next layer must overlap by at least 50 mm

Fix 14mm staples every 50mm
Tape seal any joists or overlaps with Alutape or Silver Duct Tape
Fold finishing edges under by 50mm and staple or secure with batten
EcoQuilt is most effective with a 25mm air space on both sides

General Guidelines

During fitting, care must be taken to ensure the EcoQuilt is not damaged.
Any damage should be repaired using duct or foil tape.
Where EcoQuilt is cut to fit around openings, care must be taken to minimise gaps.
Excess material can be trimmed with a scissors or sharp utility knife.
Any exposed edges should be sealed with duct tape.
We do not recommend the use of recessed lighting due to the conflict between air tightness and fire risk.
If recessed lighting is to be used, the EcoQuilt must be cut to at least 150mm all around and special enclosures must be used around the light.
The effectiveness of the installation is reduced in this case.
EcoQuilt has the added benefit of shielding against radiation from various sources such as power lines, mobile phone masts, microwave antennae etc.
However your phone signal may be adversely affected in weak signal areas

When using EcoQuilt with other additional installation, care must be taken to ensure that all air gaps are maintained in accordance with the guidelines.